






Type: FPK1012

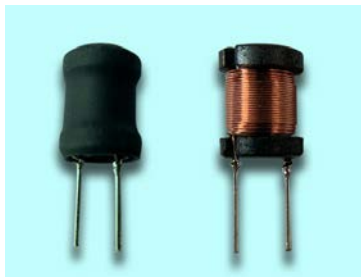


Dimensions外形尺寸(mm)

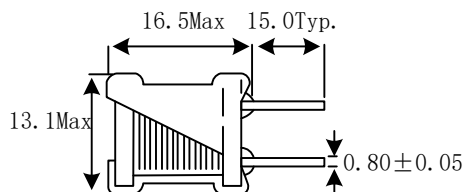

Bottom View



PRODUCT IDENTIFICATION/產品標識

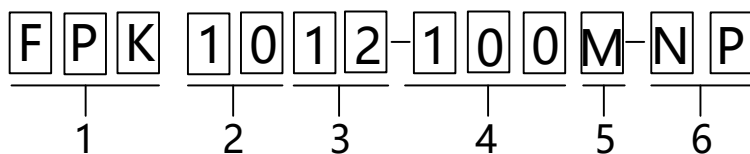

1. Product symbol/產品類型 : FPK (Unshielded/無屏蔽)
2. Body diameter/產品直徑 : mm
3. Body height/產品高度 : mm
4. Inductance/感量 :  $\mu\text{H}$
5. Tolerance/公差 : K  $\pm 10\%$ , M  $\pm 20\%$ , N  $\pm 30\%$
6. RoHS Compliant(SGS Certified)

本產品滿足環境保護要求(有害物質限用)



FEATURES:

- Open magnetic circuit construction.
- Low cost and high reliability.
- Widely use in Copying machine/Display monitor/Lighting/Car electronics etc.

特長:

- 開磁路構造設計.
- 低成本及高可靠.
- 廣泛應用於影印機/顯示監視器/照明設備/汽車電子產品等.

ELECTRICAL CHARACTERISTICS/電氣特性

Part NO. 品名	Inductance 電感量( $\mu\text{H}$ )	Tolerance 公差(%)	DC Resistance 直流電阻Max( $\Omega$ )	Rated Current 額定電流Max(A)
FPK1012-1R0	1.0	N	0.010	6.00
FPK1012-1R5	1.5	N	0.010	6.00
FPK1012-1R8	1.8	N	0.015	6.00
FPK1012-2R7	2.7	N	0.015	5.50
FPK1012-3R3	3.3	N	0.015	5.50
FPK1012-3R9	3.9	N	0.020	5.00
FPK1012-4R7	4.7	M	0.020	5.00
FPK1012-5R6	5.6	M	0.025	4.80
FPK1012-6R8	6.8	M	0.025	4.80
FPK1012-8R2	8.2	M	0.025	4.50
FPK1012-100	10	M	0.025	4.50
FPK1012-120	12	K	0.025	4.30
FPK1012-150	15	K	0.035	4.30
FPK1012-180	18	K	0.040	4.00
FPK1012-220	22	K	0.045	3.70
FPK1012-270	27	K	0.045	3.50
FPK1012-330	33	K	0.055	3.00
FPK1012-390	39	K	0.060	2.50
FPK1012-470	47	K	0.080	2.30
FPK1012-560	56	K	0.085	2.00
FPK1012-680	68	K	0.095	2.00
FPK1012-820	82	K	0.110	1.80
FPK1012-101	100	K	0.140	1.70
FPK1012-121	120	K	0.160	1.50
FPK1012-151	150	K	0.180	1.40
FPK1012-181	180	K	0.250	1.30

Inductance Range/電感範圍:1.0~1000  $\mu\text{H}$

Operating Temperature/工作溫度:-40°C ~ +125°C

Storage Temperature/儲存溫度:-40°C ~ +125°C

(1) Test frequency :1KHz/0.25V;

(2) The maximum allowable current is a DC current which causes initial inductance to decrease by 10%, or temperature to rise by 40°C, whichever is smaller (At ambient reference temperature:25°C).

(1) 電感測試頻率:1KHz/0.25V;

(2) 最大容許電流定義:電感下降10%或溫度上升40°C時,取其小值作為最大容許電流(周圍環境溫度25°C).



Part NO. 品名	Inductance 電感量( $\mu$ H)	Tolerance 公差(%)	DC Resistance 直流電阻Max( $\Omega$ )	Rated Current 額定電流Max(A)
FPK1012-221	220	K	0.280	1.00
FPK1012-271	271	K	0.420	0.90
FPK1012-331	330	K	0.540	0.80
FPK1012-391	390	K	0.600	0.80
FPK1012-471	470	K	0.660	0.70
FPK1012-561	560	K	0.740	0.60
FPK1012-681	680	K	0.840	0.50
FPK1012-821	820	K	1.080	0.50
FPK1012-102	1000	K	1.390	0.45

Electrical Schematic/原理圖



In addition to the standards versions shown here, custom inductors are also available to meet your exact requirements.

除了這裡顯示的標準品之外,可根據客戶要求進行設計.

[www.fonrita.com](http://www.fonrita.com)