






Type: HDMT404030




Dimensions外形尺寸(mm)

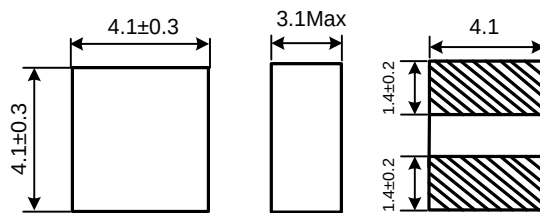

Recommended Land Pattern(mm)



PRODUCT IDENTIFICATION/產品標識

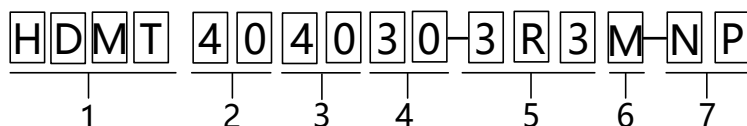

1. Product symbol/產品類型 : HDMT (shield/屏蔽)
2. Body length/產品長度 : mm
3. Body wide/產品寬度 : mm
4. Body height/產品高度 : mm
5. Inductance/感量 : μH
6. Tolerance/公差 : M $\pm 20\%$, N $\pm 30\%$
7. RoHs Compliant(SGS Certified)

本產品滿足環境保護要求(有害物質限用)



FEATURES:

- Quantity/reel:2000PCS.
- Square 4.1mm type(4.4mm Max),Height 3.1mm Max.
- Extremely low DCR and ultra low AC losses for high switching frequencies(up to 5MHz).
- Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference(EMI).
- No thermal aging issues.
- Widely use in DC-DC converter/Notebook/5G modiles etc.

特長:

- 數量/卷:2000PCS.
- 方形4.1mm(4.4mm Max),高度3.1mm Max.
- 在高開關頻率(高達5MHz)下具有極低DCR和交流損耗.
- 閉合磁路設計減少漏磁和電磁干擾(EMI).
- 無熱老化問題.
- 廣泛應用於升降壓轉換器/筆記本電腦/5G模塊等.

ELECTRICAL CHARACTERISTICS/電氣特性

Part NO. 品名	Inductance 電感量(μH)	Tolerance 公差(%)	D.C.R. 直流電阻		I sat(Max) 飽和電流(A)	I rms(Max) 溫升電流(A)
			Typ(m Ω)	Max(m Ω)		
HDMT404030-R12	0.12	M	0.90	1.10	34.0	35.0
HDMT404030-R22	0.22	M	2.00	2.40	25.0	24.7
HDMT404030-R33	0.33	M	2.50	3.00	21.0	21.0
HDMT404030-R47	0.47	M	3.20	3.80	18.0	19.0
HDMT404030-R56	0.56	M	4.00	5.00	17.0	17.0
HDMT404030-R68	0.68	M	4.40	5.20	16.0	16.0
HDMT404030-1R0	1.0	M	6.00	7.20	10.5	14.0
HDMT404030-2R2	2.2	M	15.00	18.00	8.0	9.0
HDMT404030-3R3	3.3	M	18.20	21.80	6.5	8.0
HDMT404030-4R7	4.7	M	31.00	38.00	5.0	5.9
HDMT404030-100	10	M	92.00	110.00	4.6	3.3

Inductance Range/電感範圍:0.12~10 μH

Operating Temperature/工作溫度:-55℃ ~ +125℃

Storage Temperature/儲存溫度:-40℃ ~ +125℃

(1) Test frequency :1MHz/1.0V;

(2) The maximum allowable current is a DC current which causes initial inductance to decrease by 30%,or temperature to rise by 40℃, whichever is smaller(At ambient reference temperature:25℃).

(1) 電感測試頻率:1MHz/1.0V;


(2) 最大容許電流定義:電感下降30%或溫度上升40℃時,取其小值作為最大容許電流(周圍環境溫度25℃).



Electrical Schematic/原理圖



Recommended Temperature Conditions of Air Reflow Soldering/推薦回流焊溫度條件

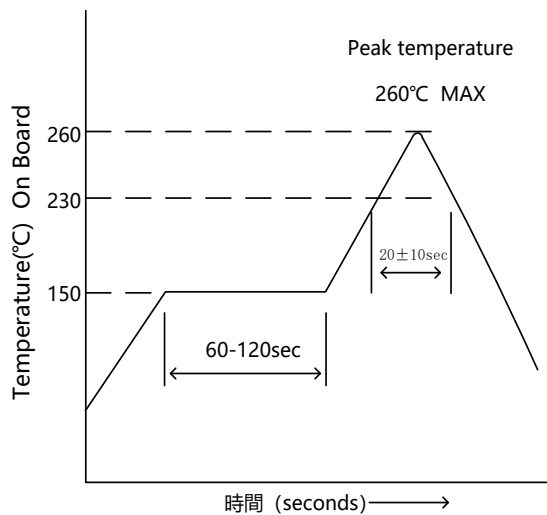

In addition to the standards versions shown here, custom inductors are also available to meet your exact requirements.

除了這裡顯示的標準品之外,可根據客戶要求進行設計.

www.fonrita.com